

Symaro™

QAE2164...
QAE2174...

-
- AC 24 V DC 13.5...35 V
- DC 0...10 V 4...20 mA

-
-
-


| | | | | |
|-------------|----------|--------|-----------------------------------|-------------|
| QAE2164.010 | G ½ A 1) | 100 mm | AC 24 V ±20 % / DC 13.5...35 V | DC 0...10 V |
| QAE2164.015 | G ½ A 1) | 150 mm | AC 24 V ±20 % / DC 13.5...35 V | DC 0...10 V |
| QAE2174.010 | G ½ A 1) | 100 mm | DC 13.5...35 V | 4...20 mA |
| QAE2174.015 | G ½ A 1) | 150 mm | DC 13.5...35 V | 4...20 mA |

1) 2008.4.1

DC 0...10 V 4...20 mA

DC 0...10 V 4...20 mA

I1

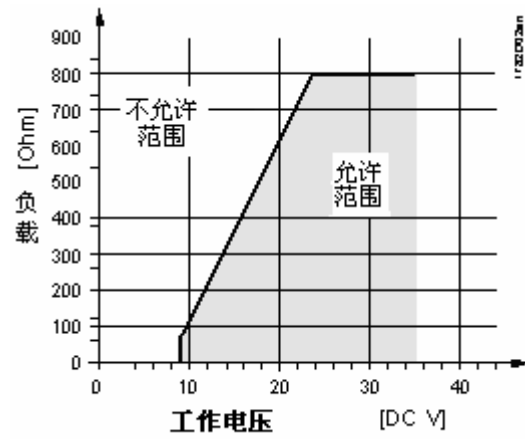

()

| | | | | | |
|--|----------------|------|--|--------|------------|
| | V4A (1.4571) | PN16 | | --- | AQE2102 |
| | (CuZn37) | PN10 | | 100 mm | ALT-SB100 |
| | Brass (CuZn37) | PN10 | | 150 mm | ALT-SB150 |
| | V4A (1.4571) | PN16 | | 100 mm | ALT-SS100 |
| | V4A (1.4571) | PN16 | | 150 mm | ALT-SS150 |
| | V4A (1.4571) | PN40 | | 100 mm | ALT-SSF100 |
| | V4A (1.4571) | PN40 | | 150 mm | ALT-SSF150 |

N1194

PN10

(V4A)

EMC

-
-
-
-


1.5m 2m

1.5m

60mm

T

G ½



!

(G ½)

(

)

| | | |
|----------------------------|-----|---|
| | | “ ” |
| | | 50/60 Hz AC 24 V |
| | | ≤1 VA |
| | | 10...+120 °C (R2 =), 0...100 °C (R1), 0...70 °C (R3) |
| | | “ ” |
| | | Pt 1000 class B DIN EN 60 751 |
| | | 30 s 2 m / s 8 s 2 m / s |
| | | ±1 K ±1.4 K |
| 0...70 °C -40...+120 °C | | |
| | U1 | DC 0...10 V $\hat{=}$ -10...+120 °C () 0...100 °C 0...70 °C, ±1 mA |
| | I1 | 4...20 mA $\hat{=}$ -10...+120 °C () 0...100 °C or 0...70 °C |
| | | PN 16 |
| | | IP 54 IEC 529 |
| | | III EN 60 730 |
| | | 1 x 2.5 mm ² 2 x 1.5 mm ² |
| | () | M 16 x 1.5 |
| | | IEC 721-3-3 class 3K5 -40...+70 °C 5...95 % r.h. |
| | | IEC 721-3-2 class 2K3 -25...+70 °C <95 % r.h. class 2M2 |
| | | , RAL 7001 () |
| | | , RAL 7035 () |
| | | DIN 17 440 1.4571 |
| | | PA, RAL 7035 () |

EN 60 730-1

EN 61 000-6-2
EN 61 000-6-3

CE CE

EMC Directive 2004/108/EC

